


## 型号说明


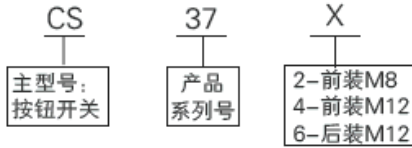


▲材料:  
外壳: 铜镀镍/铬  
基座: 酚醛纤维板  
导电片: 铜镀银  
接线端子: 铜镀银



## ▲主要技术参数

额定电压/电流	介电强度	接触电阻	耐久性(寿命)	环境温度
50VAC/100mA	250VAC50Hz/1min	≤0.05 Ω	>10000次	-40℃ - +85℃


### CS372 3P ON-(ON)

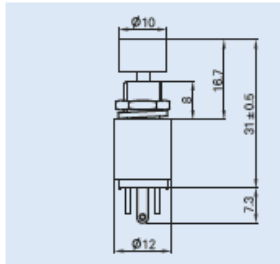

### CS374 3P ON-(ON)


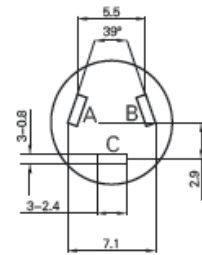
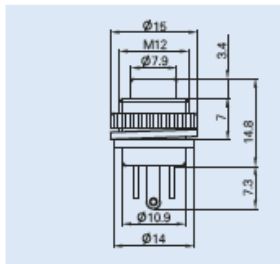


### CS376 3P ON-(ON)

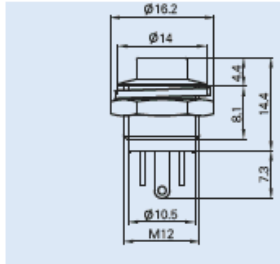




引线脚分布图

### DS428 3P ON-(ON)

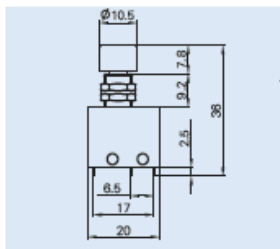

主要技术参数  
额定电压/电流: 250VAC/1A  
介电强度: 1500VAC50Hz/1min  
接触电阻: ≤0.02 Ω  
耐久性(寿命): >50000次  
环境温度: -40℃ - +85℃

### DS438 3P ON-(ON)

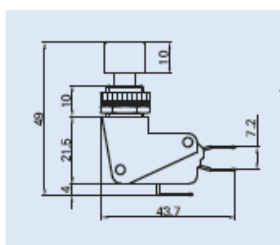

主要技术参数  
额定电压/电流: 250VAC/16A  
介电强度: 1500VAC50Hz/1min  
接触电阻: ≤0.02 Ω  
耐久性(寿命): >50000次  
环境温度: -40℃ - +85℃