




XN-2-2208-EA1


- Single/Double Pole; Single/Double Throw
- Ratings:
16A 125VAC; 10A 250VAC, UL
8A 250VAC; TUV, VDE, CQC
- Features:
Knob, Terminal Options see selections guide

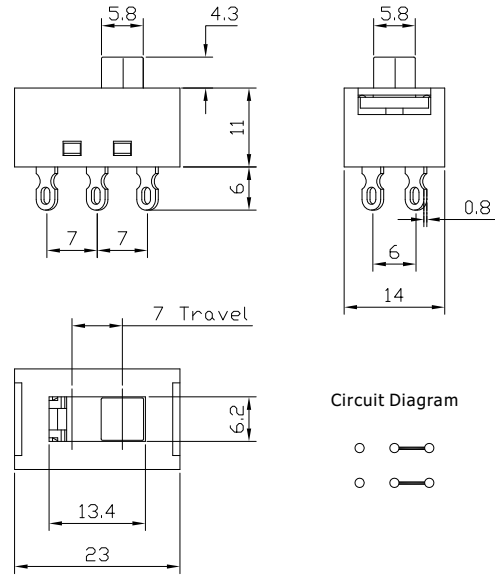

XN-2- 2208 -XX1

Double Pole	2	2	0	8	-	X	X	1	Housing Code
2 Position	2	2	0	8	-	X	X	1	Terminal Code
Current at 250VAC	2	2	0	8	-	X	X	1	Actuator Code

Actuator Options

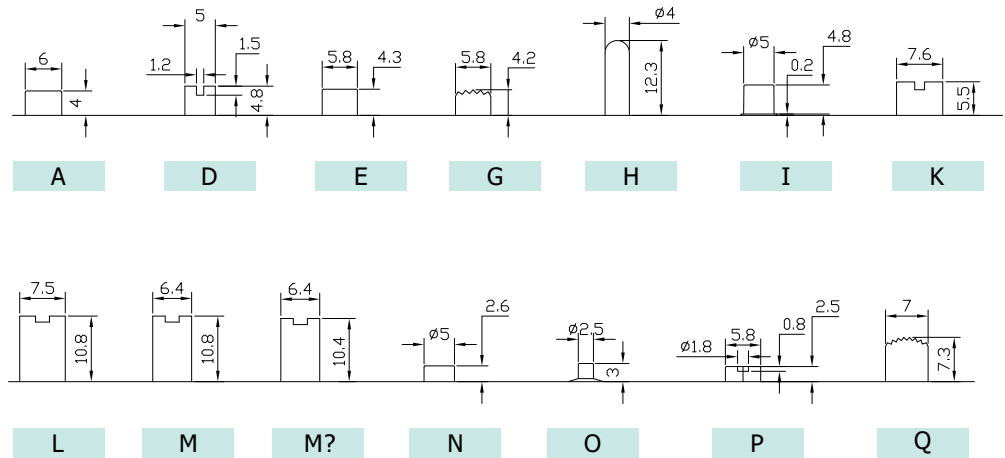

Terminal Options

